

Wireless  
Supports High-Def. Video  
Sufficient Power for Displaying Flash Content  
High Quality Audio Output  
HDMI & VGA Dual Independent Display

**ENS**

Your Digital Sign Solution




**PREMIER·BOX**

Available through  **FOR BUSINESS**


1.877.423.3429 | [forbusiness@bestbuycanada.ca](mailto:forbusiness@bestbuycanada.ca)

1080 Meares St. Victoria BC 250.483.4719 [www.enscorporate.com](http://www.enscorporate.com)

**Drive Bay / Control:**

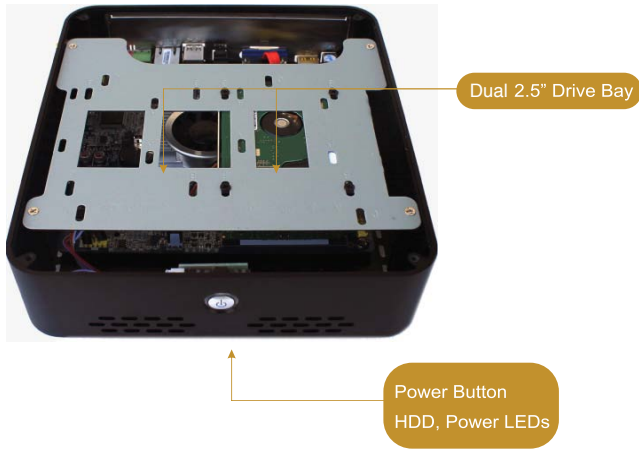

**Rear I/O:**

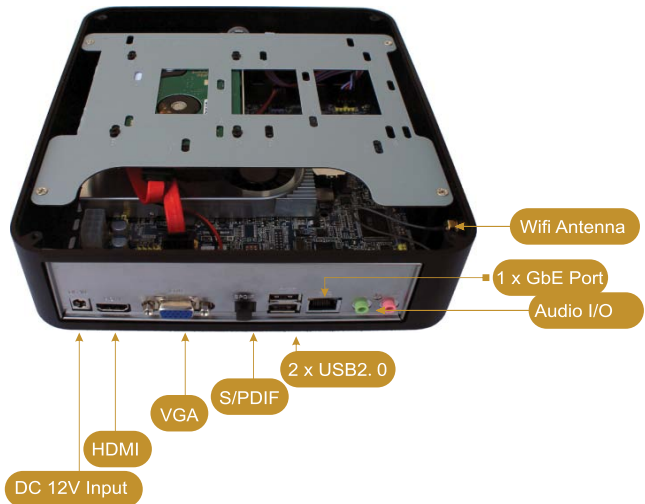

## Specifications

	ENS Premier Sign Box
Processor	Intel Atom D525 (1.80GHz, dual-core, 677 MHz,FSB)
Chipset	Intel NM10 Express Chipset
Memory	2x DDR2 SODIMM slots, support up to 4GB (2 GB Standard)
Graphic	NVIDIA ION2 GPU w/ dedicated 512MB DDR3 Memory
Display	VGA and HDMI up to 2560x1600, Dual Independent Display
Audio	HD Audio 5.1 Channel, HDMI or SPDIF (Optical)
LAN	Realtek RTL8111C, 10/100/1000Mbps, 1x Rj45
Wireless	Internal Mini-PCIE module
Expansion	2x Mini-PCIE slots (on the bottom of the board)
I/O	1 x COM, 2 x external + 4 x internal USB2.0
O/S	Linux loads from CF(SATA to CF adaptor included)
Storage	2 x Internal 2.5" SATA HDD/SSD mounting (HD Extra)
Power	Consumption Average < 30W, DC +12V@5A minimum
Temperature	0°C ~ 45°C operating
Dimensions	200 mm×225 mm×55 mm (W×D×H)